

Han[®] 3A Solutions

Rugged and Compact Connectivity



Pushing Performance
Since 1945

For further information, please reach out to
techsupportUS@HARTING.com

Insert Range

Various insert options ranging from 100A to High-Speed Data Connectivity

Options in wire termination – crimp, screw, QuickLock[®], axial screw and IDC

100A
Single Pole



40A
3+GND



16A
5+GND



10A
12+GND



6.5A
21



Hybrid
4+4+data



10G
Ethernet




Fiber
Optics



Hood & Housing Configurations

Many mounting possibilities for any application

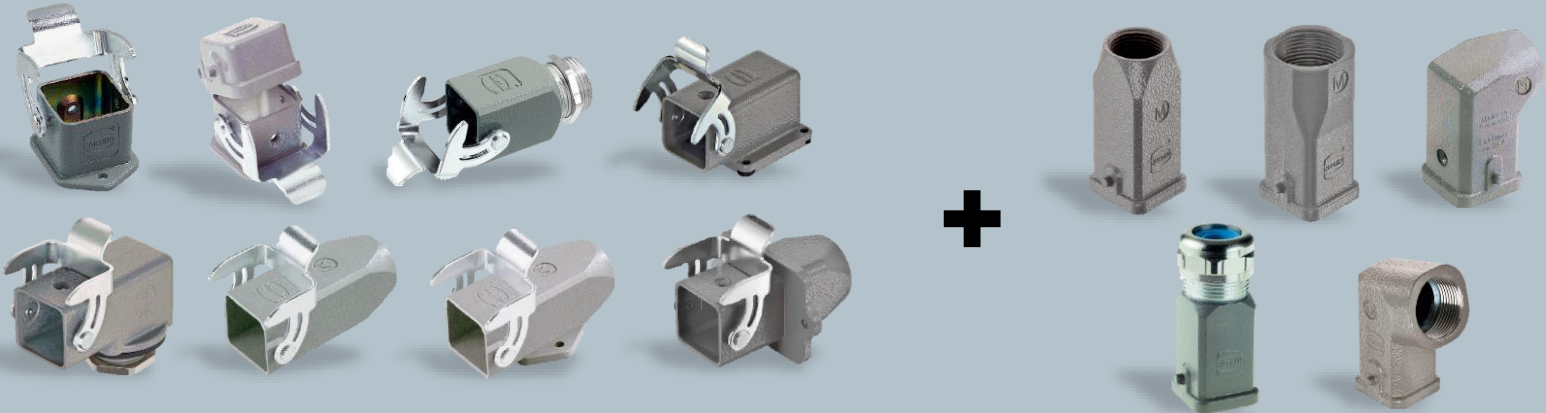

Housing Range

Bulkhead Mount, Screw Mount, Inline, Angled, Panel Feed Through

Hood Range

Top Entry, Side Entry

Environmental Protection

Wide selection of hood & housing materials for various degrees of protection



Grey Metal



HMC
High Mating Cycle
>10,000 Cycles



Plastic



Marine
For outdoor use



EMC
For higher EMC requirements



HPR
IP68/69k
For the most rugged environments



INOX
Stainless Steel



Class 1
Division 2